

300W LED SHOEBOX/ AREA LIGHT



PRODUCT FEATURES




High efficiency LED driver, 120~277VAC input range

Phillips brand Lumileds, high luminous efficiency and long life

Cast aluminum design for efficient component cooling. LED Tj<85 deg C

Focused, precise optics for highly controlled light distribution

Optional photocell control available




PRODUCT APPLICATIONS

Pole mount or wall mount configurations suitable for parking lots, area and site and security lighting.

STRUCTURAL DATA



Housing materials: Cast Aluminum and Polycarbonate
Finish Options: Dark Bronze/ White
Net Weight: 11.5 kg/ 25.4 lbs

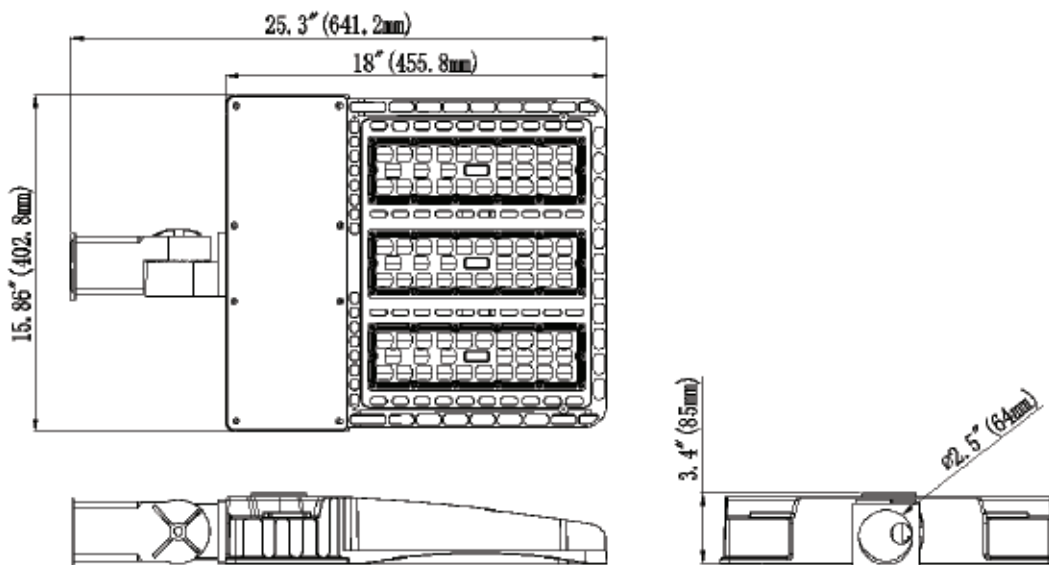


TECHNICAL PARAMETERS

Type	AT-WSD-SB30W27-XXK-Z-TN-U-Y		
Power	300w	Distribution Options	Type II, Type III, Type V
Input Voltage	120~277VAC	Lumen Depreciation	<5% @ 6000 hrs
PF	>0.95	Service Life	>50,000 hrs
Driver Efficiency	>90%	Working Temperature	-30 ~ +45 deg C
Luminous Flux	33,600 lm	Storage Temperature	-40 ~ +80 deg C
Color Temp	3000K/4000K/5000K/5700K	Weather Rating	Wet Location/ IP65
CRI	Ra>80	Internal Cable	3 Core, 18AWG

PHOTOMETRICS (Type V):

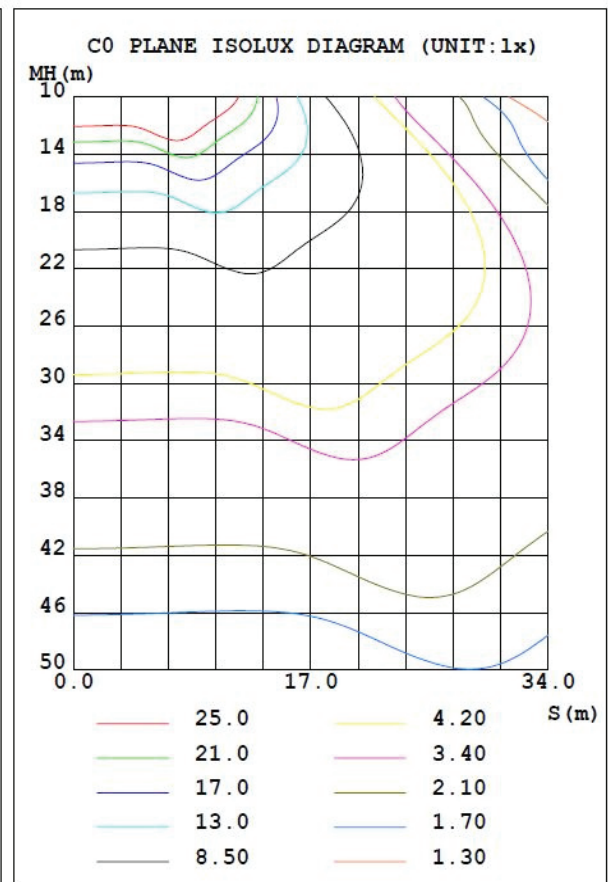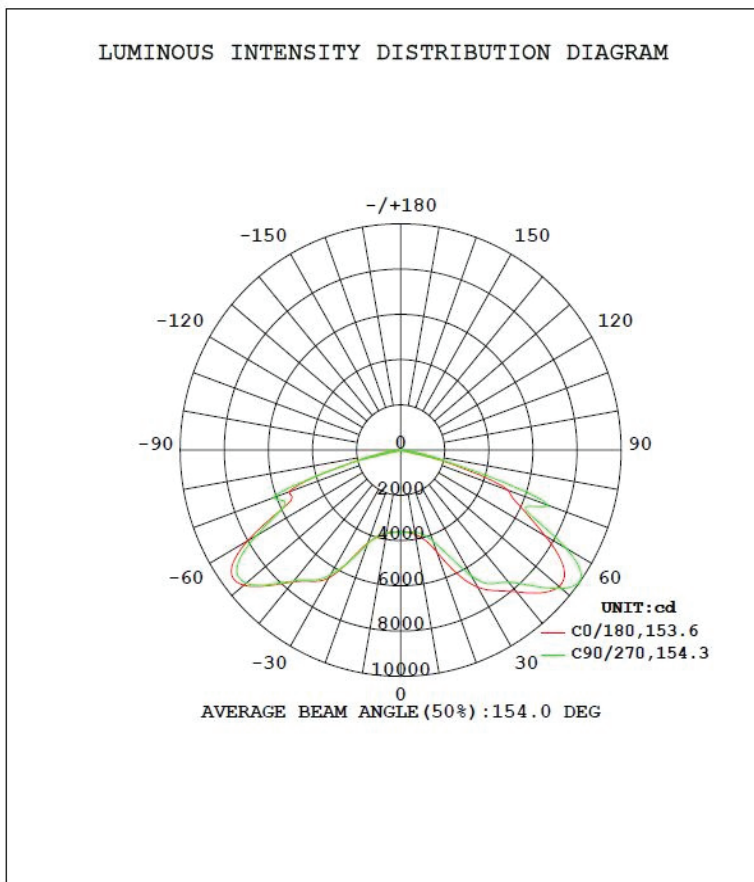

ACCESSORY OPTIONS:

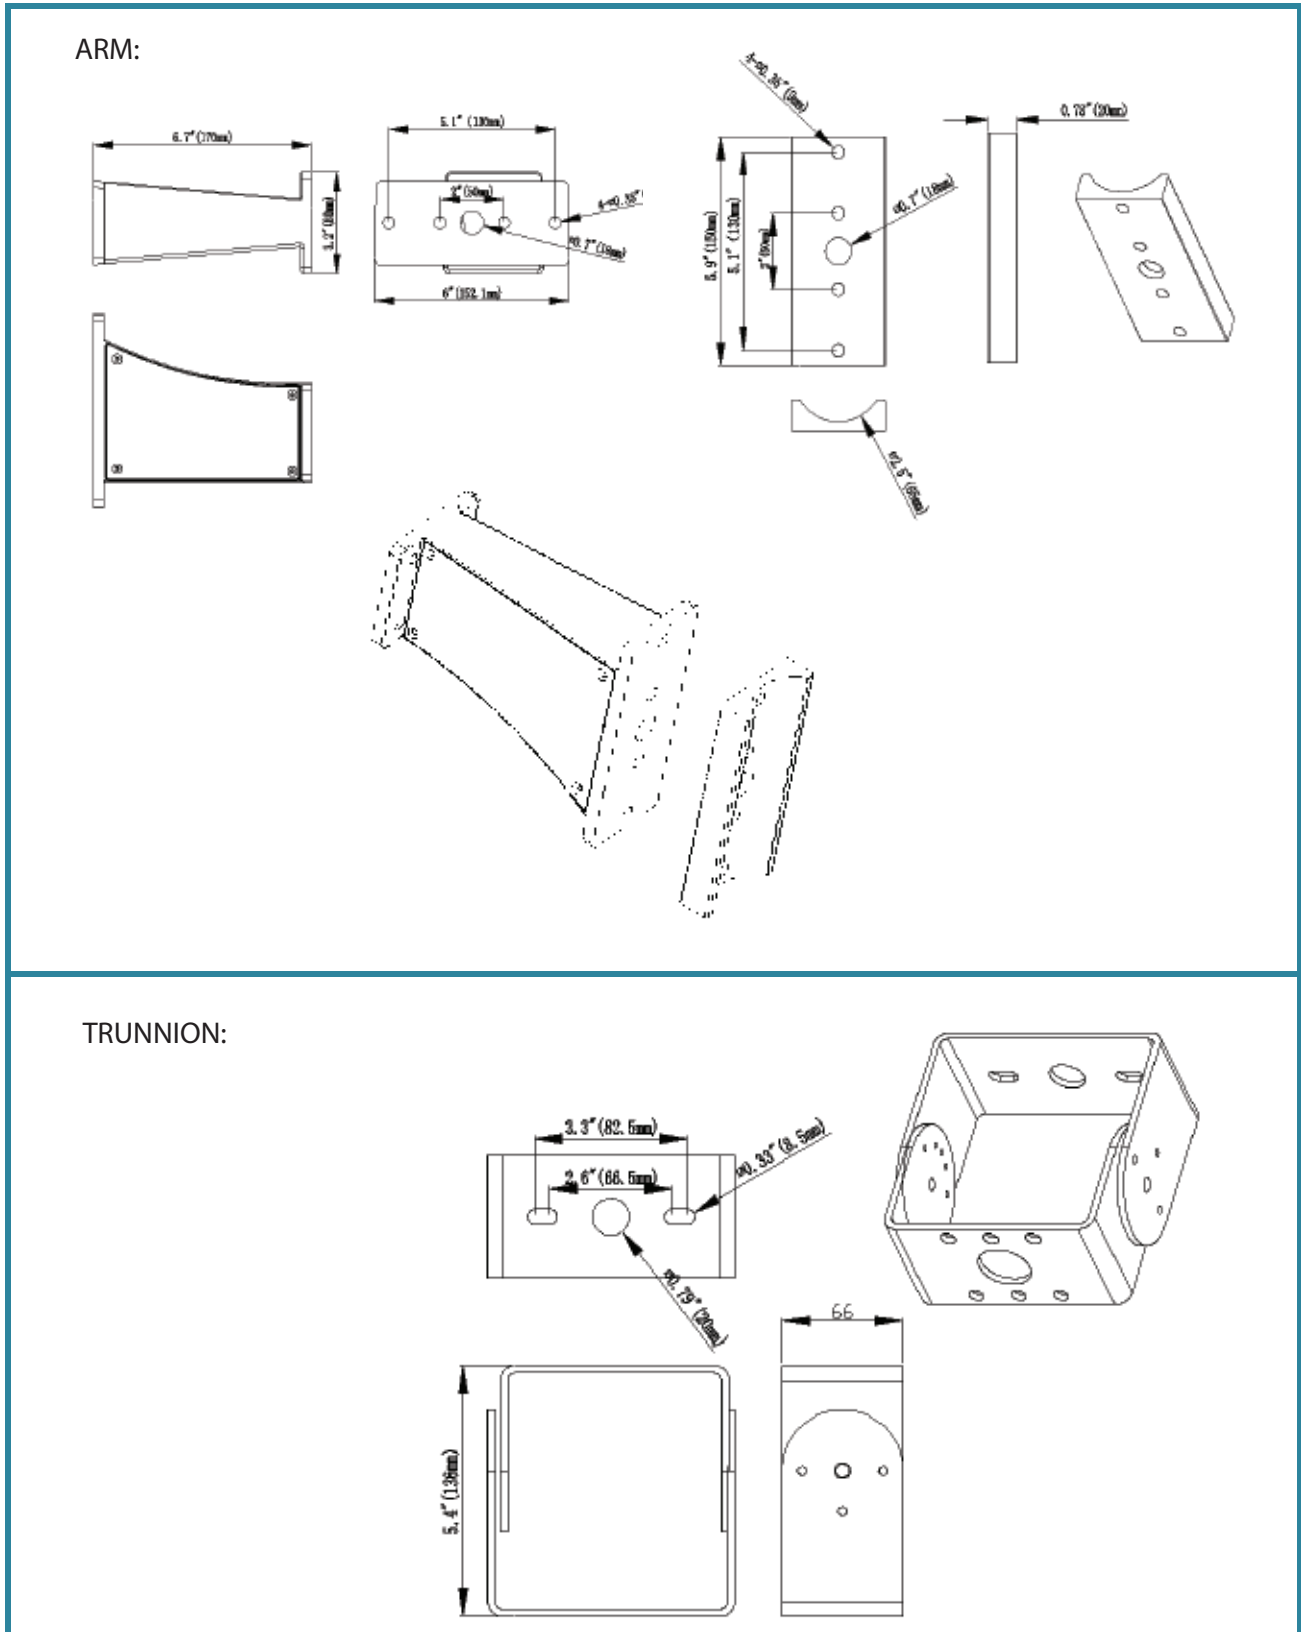

300W LED SHOEBOX/ AREA LIGHT



ORDERING INFORMATION:

EXAMPLE: AT-WSD-SB 30W27-50K-D-T3-S-P

WSD	SB	15W	27	50K	D	T3	S	P
Series	Product	Power	Voltage	Color Temp	Finish	IES	Mount	Control
	SB (SHOEBOX LIGHT)	06W (60W) 10W (100W) 15W (150W) 20W (200W) 30W (300W)	27 (120~277V) 48 (200~480V)	30K (3000K) 40K (4000K) 50K (5000K) 57K (5700K) +/- 500K	D (DARK BRONZE) W (WHITE)	T2 (TYPE2) T3 (TYPE3) T5 (TYPE5)	S (SLIPFITTER) T (TRUNNION) A (ARM)	P (100-277V PHOTOCELL)

PRODUCT CERTIFICATIONS:



CONTACT US:

ACCURATE TECHNOLOGIES, INC.
4420 E. ADAMO DRIVE
SUITE 206
TAMPA, FLORIDA 33605

888 439 7556

WWW.ACCURATETECHINC.COM